





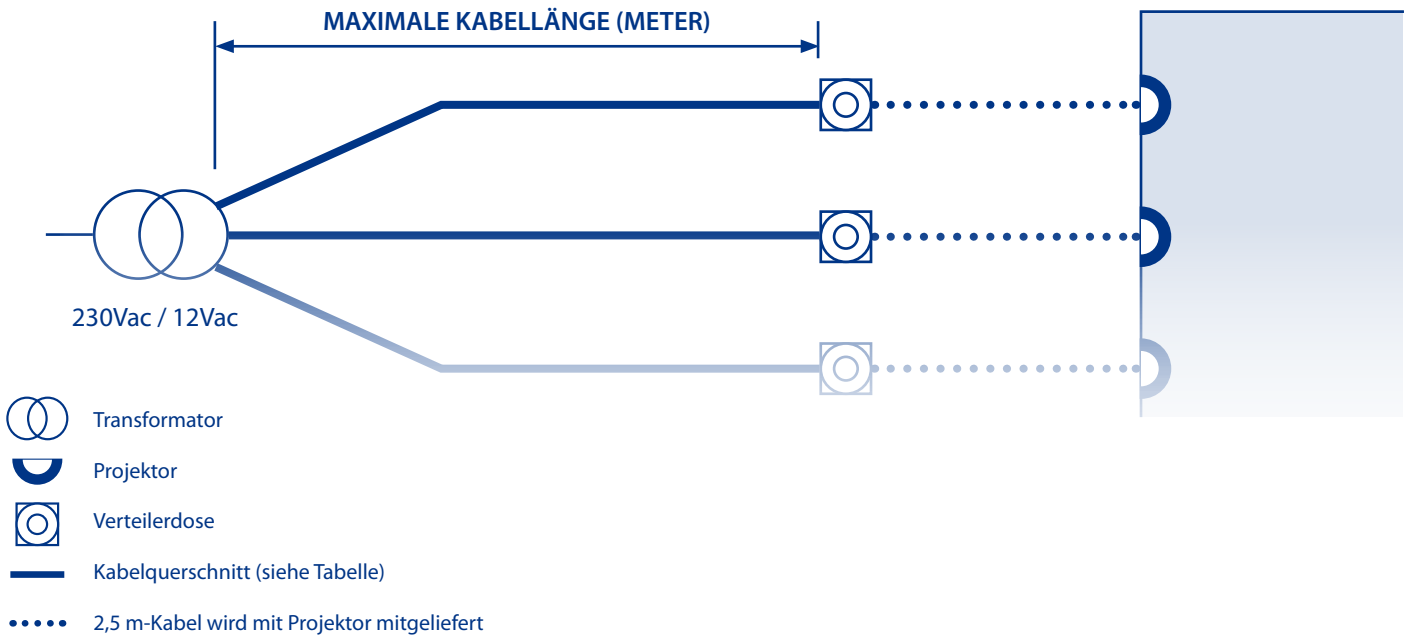


## ► INSTALLATION PARALLELSCHALTUNG

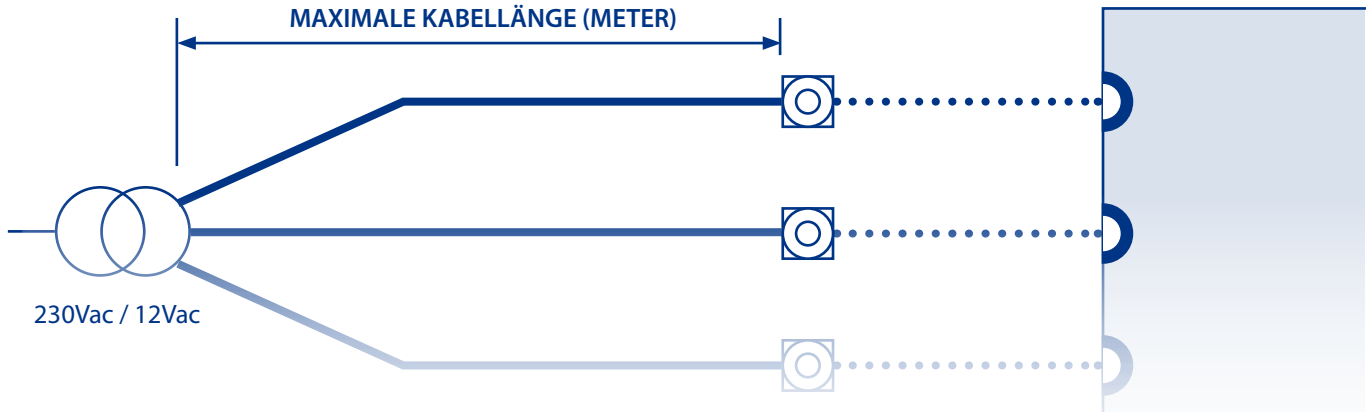

CODE	MODELL	MAXIMALE KABELLÄNGE (METER)					
		2x1,5mm <sup>2</sup>	2x2,5mm <sup>2</sup>	2x4mm <sup>2</sup>	2x6mm <sup>2</sup>	2x10mm <sup>2</sup>	2x16mm <sup>2</sup>
56001	LumiPlus PAR56 V1 AC RGB lamp	7	14	22	33	56	90
59126	LumiPlus PAR56 V1 AC RGB Wireless lamp						
71205	LumiPlus Flexi V1 AC RGB wireless						
71203	LumiPlus Flexi V1 AC RGB						
52596	LumiPlus PAR56 V1 AC W lamp	16	33	54	81	135	216
71200	LumiPlus Flexi V1 AC W						
71212	LumiPlus FlexiNiche V1 AC W						
71214	LumiPlus FlexiSLIM V1 AC W						
71216	LumiPlus FlexiRapid V1 AC W						
67515	LumiPlus PAR56 V1 DC W lamp	65	135	215	320	530	870
71201	LumiPlus Flexi V1 DC W						
71213	LumiPlus FlexiNiche V1 DC W						
71215	LumiPlus FlexiSLIM V1 DC W						
71217	LumiPlus FlexiRapid V1 DC W						
43411	LumiPlus PAR56 V2 AC RGB lamp	3	7	11	17	29	47
45637	LumiPlus PAR56 V2 AC RGB DMX lamp						
67516	LumiPlus PAR56 V2 DC W lamp	27	55	90	140	240	380
71202	LumiPlus Flexi V2 DC W						
71233	LumiPlus Flexi V2 AC W						
71204	LumiPlus Flexi V2 AC RGB	3	8	13	20	33	58
71208	LumiPlus Flexi V2 AC RGB DMX						
59803	LumiPlus Design RGB						
59801							
59811	LumiPlus Design RGB DMX						
59809							
59807							
59805	LumiPlus Design W						

## ► INSTALLATION PARALLELSCHALTUNG



-  Transformator
-  Projektor
-  Verteilerdose
-  Kabelquerschnitt (siehe Tabelle)
-  ..... 2,5 m-Kabel wird mit Projektor mitgeliefert

CODE	MODELL	MAXIMALE KABELLÄNGE (METER)					
		2x1,5mm <sup>2</sup>	2x2,5mm <sup>2</sup>	2x4mm <sup>2</sup>	2x6mm <sup>2</sup>	2x10mm <sup>2</sup>	2x16mm <sup>2</sup>
52124 - 52125 52126 - 52127 52128 - 52129 52130 - 52131 52132 - 52133 52134 - 52135 52136 - 52137 52138 - 52139 52140 - 52141	LumiPlus Mini V2	34	68	109	162	272	436
59971 - 59972 59973 - 59974 59975 - 59976 59977 - 59978 59979 - 59980 59981 - 59982 69633 - 69634 69635 - 69636 69637 - 69638	LumiPlus Mini V3	34	68	109	162	272	436
38814 - 38816 40765 - 40766 64552 - 64553 64554 - 64555 64557 - 64558 64559 - 64560	LumiPlus Micro	34	68	109	162	272	436

Die berechneten Querschnitte entsprechen den Normen IEC 60287-1-3:2002